

Shark

Porcelain tiles




SHARK | SHARK-S_90,7*90,7/L/R PURE-W_90/R




SHARK | SHARK-N_60,7*60,7/R

Shark

Porcelain tiles

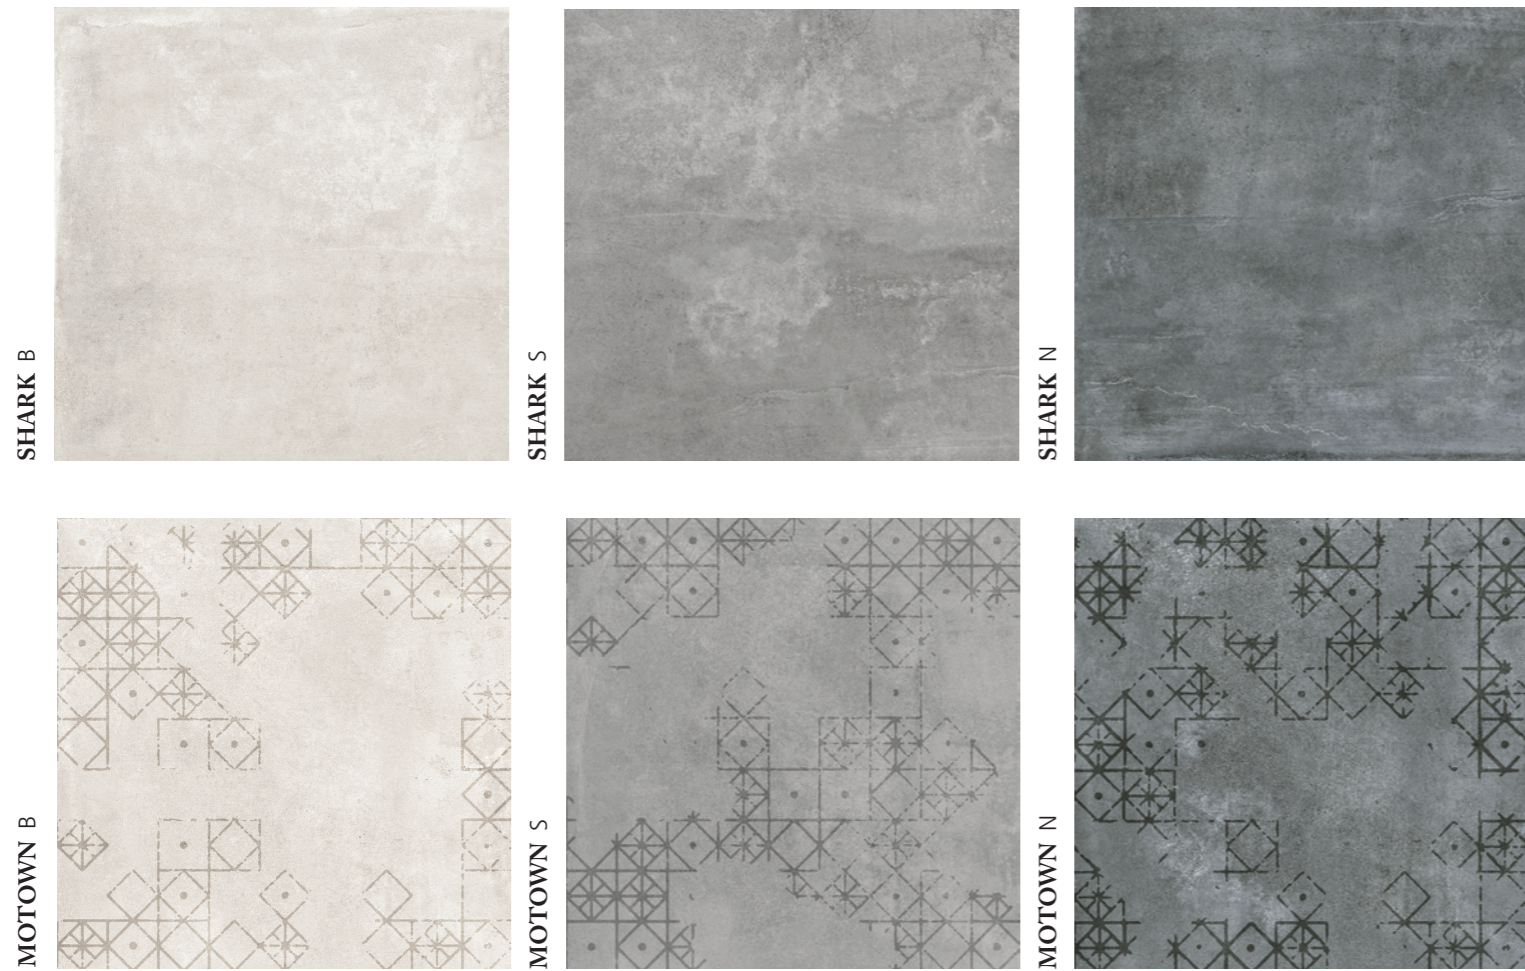


SHARK

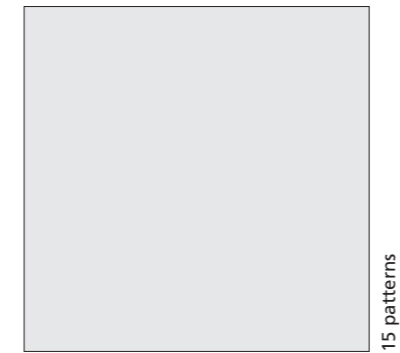

90,7 * 90,7 * 1,2 cm | 35 1/16 * 35 1/16 * 1/2"


	RECTIFIED	NATURAL PRICE CODE BN48	LAPADO PRICE CODE BN42
B		18330	18336
S		18339	18340
N		18337	18338



60,7 * 60,7 * 1 cm | 23 7/8 * 23 7/8 * 3/8"

	RECTIFIED	NATURAL PRICE CODE BN33	LAPADO PRICE CODE BN38
B		18329	18331
S		18332	18333
N		18334	18335

MOTOWN




60,7 * 60,7 * 1 cm | 23 7/8 * 23 7/8 * 3/8"

	RECTIFIED	NATURAL PRICE CODE BN40	LAPADO PRICE CODE BN83
B		18485	18488
S		18486	18489
N		18487	18490



45 * 90,7 * 1,2 cm | 17 3/4 * 35 1/16 * 1/2"

	RECTIFIED	NATURAL PRICE CODE BN70	LAPADO PRICE CODE BN43
B		18674	18677
S		18673	18676
N		18675	18678



30,2 * 60,7 * 1 cm | 11 7/8 * 23 7/8 * 3/8"

	RECTIFIED	NATURAL PRICE CODE BN39	LAPADO PRICE CODE BN74
B		18341	18342
S		18343	18344
N		18346	18345

PIEZA COMPLEMENTARIA COMPLEMENTARY PIECE			
Rodapie - Skirting 	Peldaño técnico - Technical stair - thread 	Peldaño romo - Rounded stair - thread 	*S.K.I. *S.K.D. *Z.R.I. *Z.R.D.
8 * 90,7 3 1/8 * 35 11/16" P44 8 * 90,7/L 3 1/8 * 35 11/16" P48 8 * 60,7 3 1/8 * 23 7/8" P34 8 * 60,7/L 3 1/8 * 23 7/8" P37	30 * 90,7 11 13/16 * 35 11/16" P76 A= 1,2 cm B= 3,6 cm A= 1/2" B= 1 1/16" 30 * 60,7 11 13/16 * 23 7/8" P54 A= 1 cm B= 3 cm A= 3/8" B= 1 3/16"	30 * 90,7 11 13/16 * 35 11/16" P61 30 * 60,7 11 13/16 * 23 7/8" P64	8 * 30 3 1/8 * 11 13/16" P55

CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO ANTI-SLIP CHARACTERISTICS			
Ensayo Essay	Características Features	Resultado Result	
		NAT	LAPADO
DIN 51130	Ángulo crítico (Pies calzados) Critical angle (footwear)	R10	R9
DIN 51097	Ángulo crítico (Pies descalzos) Critical angle (Wet loaded barefoot)	A+B	-
BS-7976-2	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	+36 Wet	+25-35 Wet
UNE-ENV-12633	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	Class 2	Class 2
ISO 10545-7	Resistencia a la Abrasión Superficial/ Resistance to Surface Abrasion	PEI 4	PEI 4
QB UPEC	Producto certificado por CSTB CSTB Certified product	B60_U3S P3 E3 C2 S60-N60_U3 P3 E3 C2	

APLICACIONES APPLICATIONS				
Área Area	Revestimiento Wall		Pavimento Floor	
	NAT	LAPADO	NAT	LAPADO
Interior Internal	✓	✓	✓	✓
Exterior External	✓	✓	✓	✓
Comercial Commercial	✓	✓	✓	-
Ducha Shower	✓	✓	-	-

CARACTERÍSTICAS TÉCNICAS TECHNICAL CHARACTERISTICS			
joint 0,5 mm	frost proof *	versatile 	matt ■
diferent shades 	shade variation V3	various graphics 	

EMBALAJE PACKING									
Formato Sizes	Cajas Bo * es			Pallet			Cont./20' 21500 kg.	Cont./20' 24000 kg.	
	Piezas	m ² / sq.m	kg	Cajas	m ² / sq.m	kg			Tamaño cm aprox.
cm									
90,7 * 90,7 * 1,2	1	0,82	21,76	36	29,52	808,36	105 * 95 * 75	785,15	876,44
60,7 * 60,7 * 1	3	1,11	24,11	36	39,79	892,96	120 * 80 * 75	958,09	1069,50
45 * 90,7 * 1,2	2	0,82	22,80	36	29,52	845,80	100 * 100 * 59	750,39	837,64
30,2 * 60,7 * 1	5	0,92	18,95	48	44,00	934,60	120 * 80 * 76	1012,09	1129,78
inch									
35 11/16 * 35 11/16 * 1/2	1	8,83	47,87	36	317,75	1778,39	42 5/16 * 37 3/8 * 29 1/2	8451,22	9433,93
23 7/8 * 23 7/8 * 3/8	3	11,90	53,04	36	428,32	1964,51	47 1/4 * 31 1/2 * 29 1/2	10312,82	11511,98
17 3/4 * 35 11/16 * 1/2	2	8,83	50,16	36	317,75	1860,76	39 3/8 * 39 3/8 * 23 1/4	8077,12	9016,33
11 7/8 * 23 7/8 * 3/8	5	9,87	41,69	48	473,56	2056,12	47 1/4 * 31 1/2 * 29 15/16	10894,05	12160,80